



产品特点Technical Features

注:CBK齿轮泵有五种进口/出口位置选择:后进/前出,侧进/后出,后进/侧出,侧进/侧出,后进/后出。

Notes: The CBK gear pump has five options of inlet/outlet positions: rear in/front out, side in/rear out, rear in/side out, side in/side out, rear in/rear out.

型号代码Ordering Code

The diagram shows the product code **CBK-F-0.63-A-*-**-**** with callouts for each segment:


- CBK**: 轴伸形式 Shaft end
- F**: 花键 Spline Key
- 0.63**: 公称排量 Nominal displacement ml/r
- A**: 进出油口位置 Rear in/Rear out
- ***: 转向 Rotation
- ****: 油口形式 Joining Port




厚邦科技
HONG BANG TECHNOLOGY

外形尺寸 Outline Dimension


后盖进/泵体出 Rear in/Side out

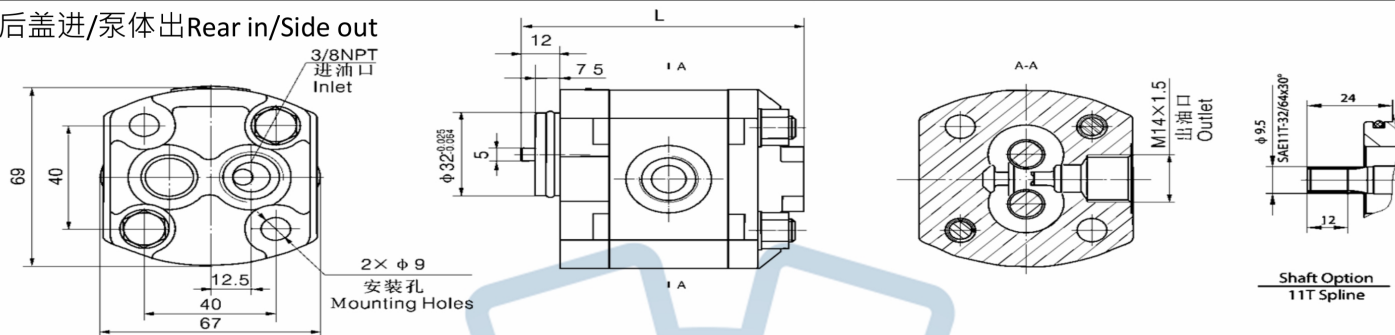


泵体进/泵体出 Side in/Side out

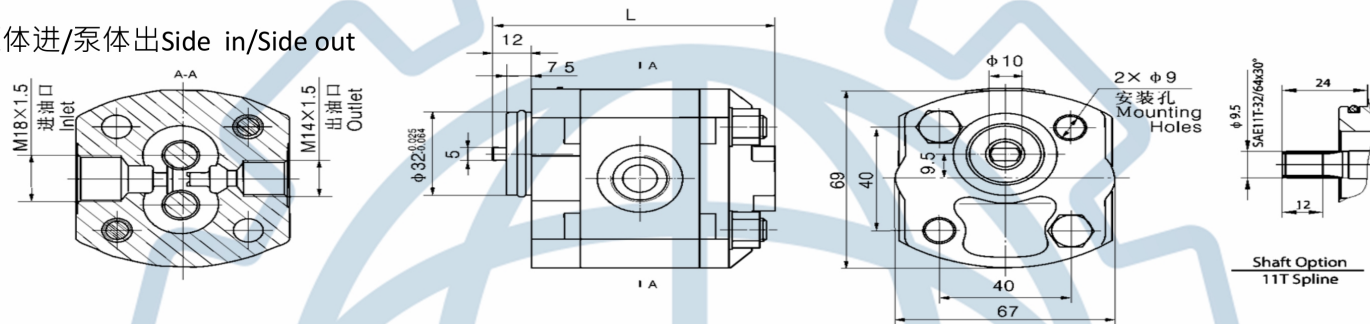


后盖进/后盖出 Rear in/Rear out

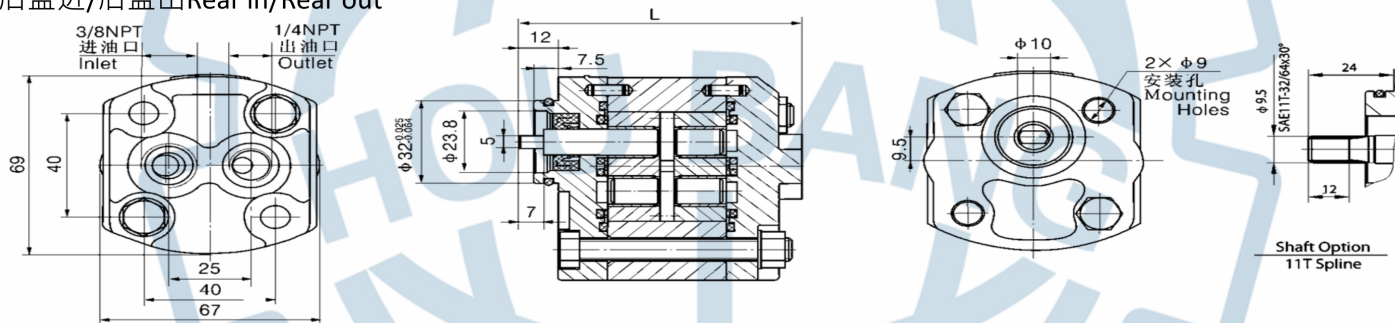

后盖进/前盖出 Rear in/front out

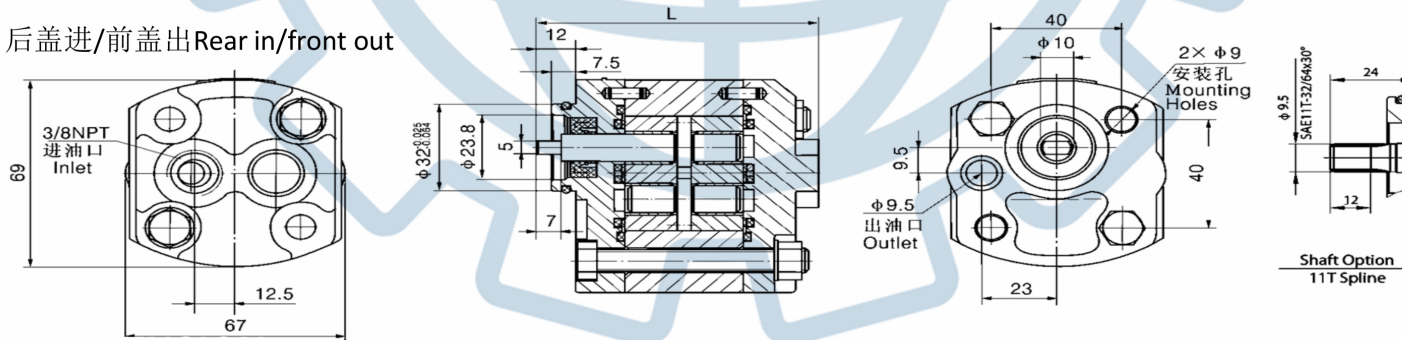

泵体进/后盖出 Side in/Rear out

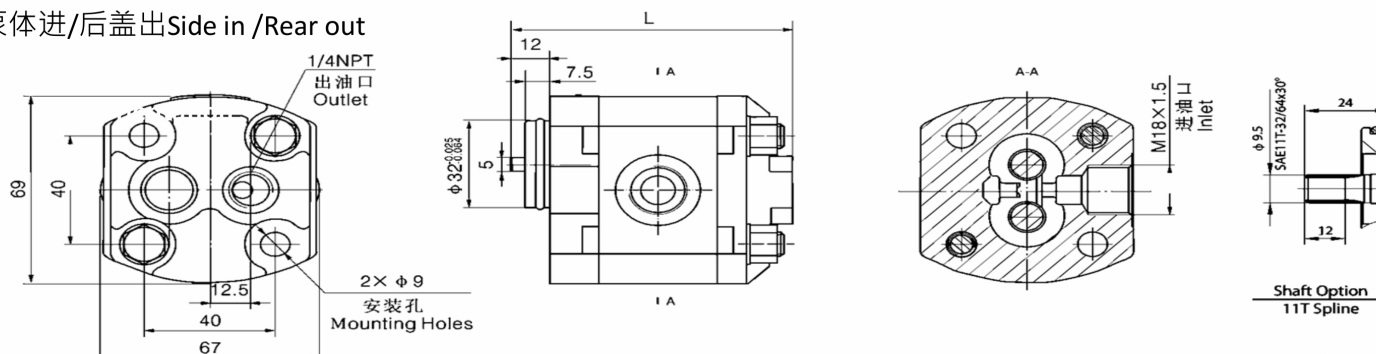

产品参数Specification

型号Model	排量 Displacement ml/r	Pressure压力 (MPa)			转速Speed (RPM)		L(mm)	容积效率 efficiency
		P1	P2	P3	额定 Rated	最高 Max		
CBK-F0.63**	0.63	20	25	28	2000	4000	84.5	85%
CBK-F0.8**	0.8						85.5	
CBK-F1.2**	1.27						87	86%
CBK-F1.5**	1.487						87.8	
CBK-F1.6**	1.66						88.5	
CBK-F2.0**	2.05	18	23	26	2000	3600	90	88%
CBK-F2.1**	2.17						90.5	
CBK-F2.5**	2.56						92	
CBK-F2.7**	2.8						93	89%
CBK-F3.2**	3.32						95	
CBK-F3.7**	3.8	14	18	23	1500	3000	97	
CBK-F4.2**	4.3						99	90%
CBK-F5**	5.1						102	
CBK-F6**	6.03						105.5	
CBK-F8**	8.08						113.5	