




CBW-F3 Gear Pump

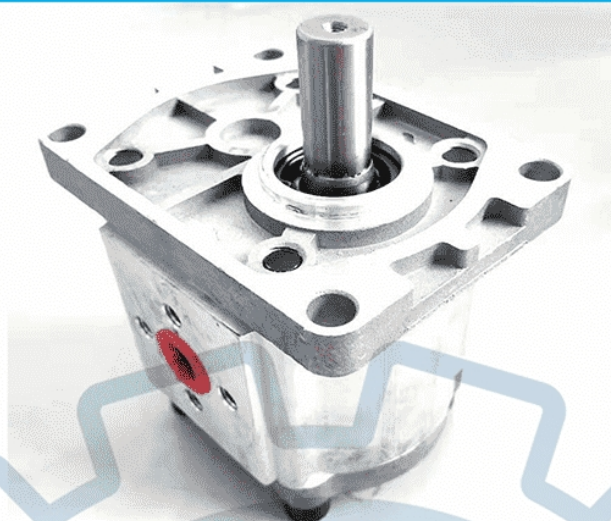

Technical Features

- ★ High strength aluminum alloy housing
- ★ The connection form of input shaft includes flat key, rectangle spline and flat end
- ★ The connection form of oil inlet and oil outlet has options of screw and flange
- ★ The automatic compensation mechanism of axial clearance gear pump to maintain a long-time high efficiency work
- ★ With high working pressure and wide speed range, it can maintain high volume efficiency even at a slow speed of 600rpm


Ordering Code

C B W - F 3 * * - * * * *

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① 产品代号 Product code
- ② 压力等级 Pressure grade E: 16MPa; F: 20MPa
- ③ 齿轮模数 Gear modulus 3
- ④ 公称排量 Nominal displacement
- ⑤ 安装形式 Mounting A: 菱形法兰 Oval ; C: 矩形法兰 Rectangle ; T: 特殊法兰 Special
- ⑥ 油口形式 Joining Port F: 法兰连接 Flange L: 螺纹连接 Screw
- ⑦ 轴伸形式 Shaft end P: 平键 plain key H: 矩形花键 Rectangular spline ; Z: 半圆键 Woodruff; B: 扁口键 Flat end
- ⑧ Rotation L: Left (Counterclockwise) R: Right (Clockwise is omitted)

Outline Dimension

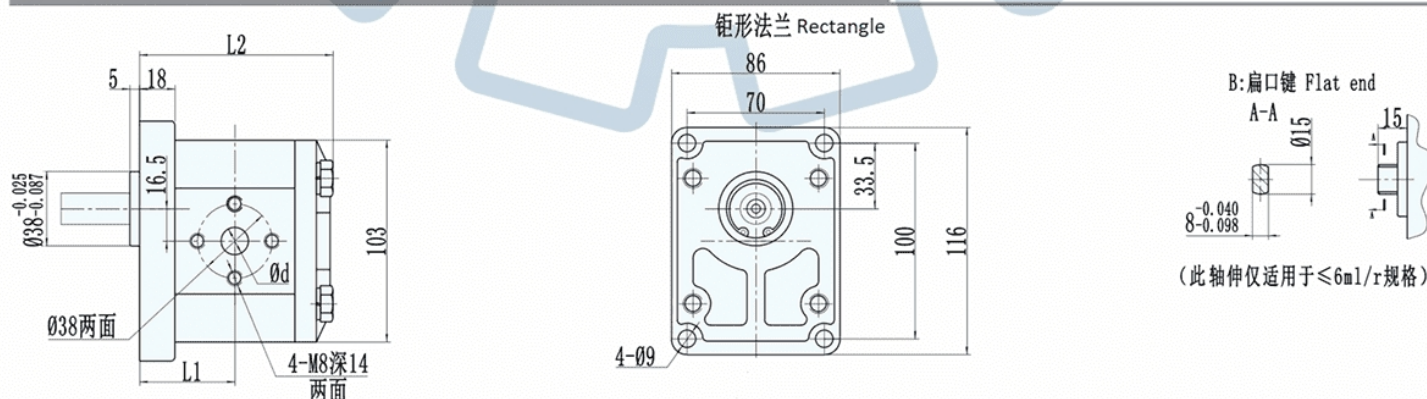

2