





## CBF-F4 Gear Pump

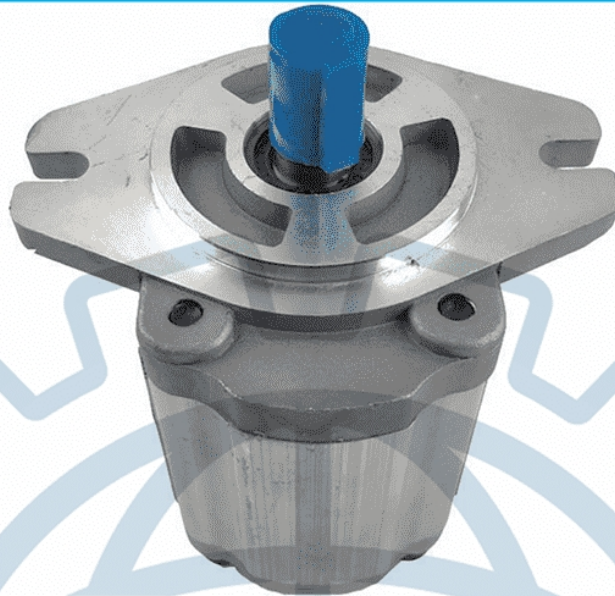

### 产品特点 Technical Features


- ★ High strength aluminum alloy housing
- ★ The connection form of input shaft includes flat key, rectangle spline and flat end
- ★ The connection form of oil inlet and oil outlet has options of screw and flange
- ★ The automatic compensation mechanism of axial clearance gear pump to maintain a long-time high efficiency work
- ★ With high working pressure and wide speed range, it can maintain high volume efficiency even at a slow speed of 600rpm

### 型号代码 Ordering Code

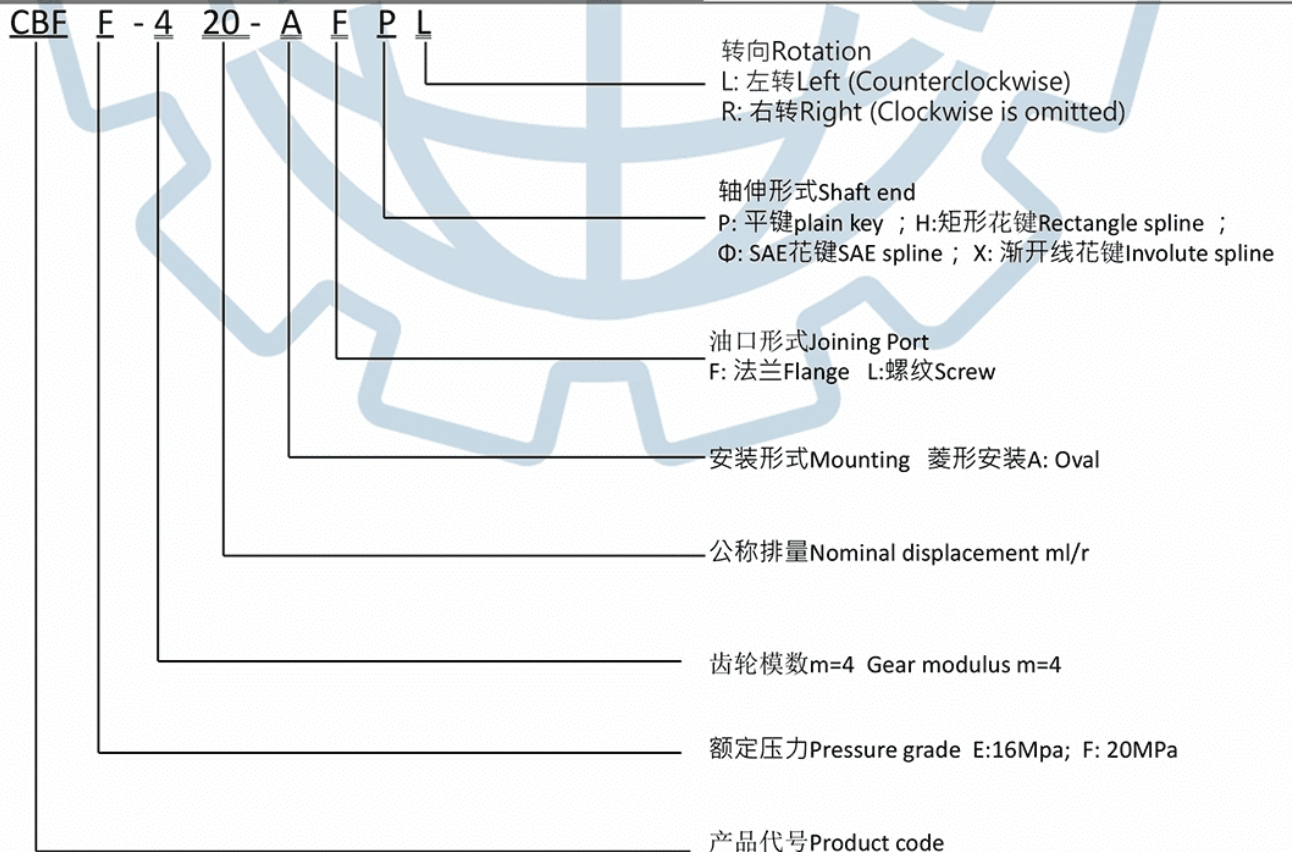



外形尺寸 Outline Dimension

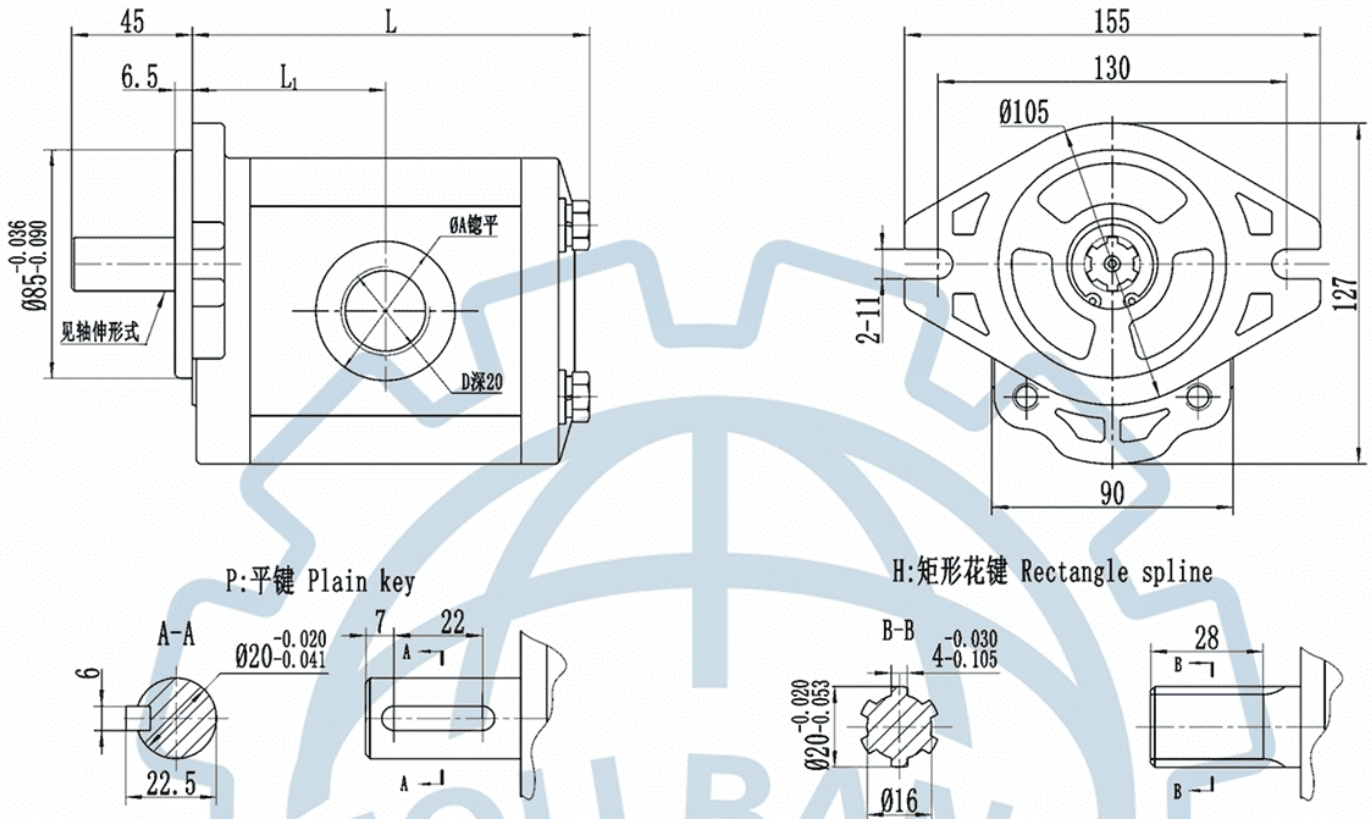

产品参数 Specification

型号 Model	理论排量 Nominal displacement (ml/r)	压力 Pressure (bar)		转速 Speed (r/min)			容积效率 Volumetric efficiency (≥%)	L1	l	进油口 Inlet		出油口 Outlet		重量 Weight (kg)
		额定 Rated	最高 Max	最低 Min	额定 Rated	最高 Max				d	a	d	a	
CBF-F410-AL**	10	20	25	800	2500	3000	92	55	114	M22×1.5	50	M22×1.5	45	3.2
CBF-F412.5-AL**	12.5													
CBF-F414-AL**	14													
CBF-F416-AL**	16													
CBF-F418-AL**	18													
CBF-F420-AL**	20	16	20	800	2500	3000	93	59.5	123	M27×2	50	M27×2	45	3.7
CBF-F425-AL**	25													
CBF-F432-AL**	32													
CBF-F440-AL**	40													
CBF-F450-AL**	50													